


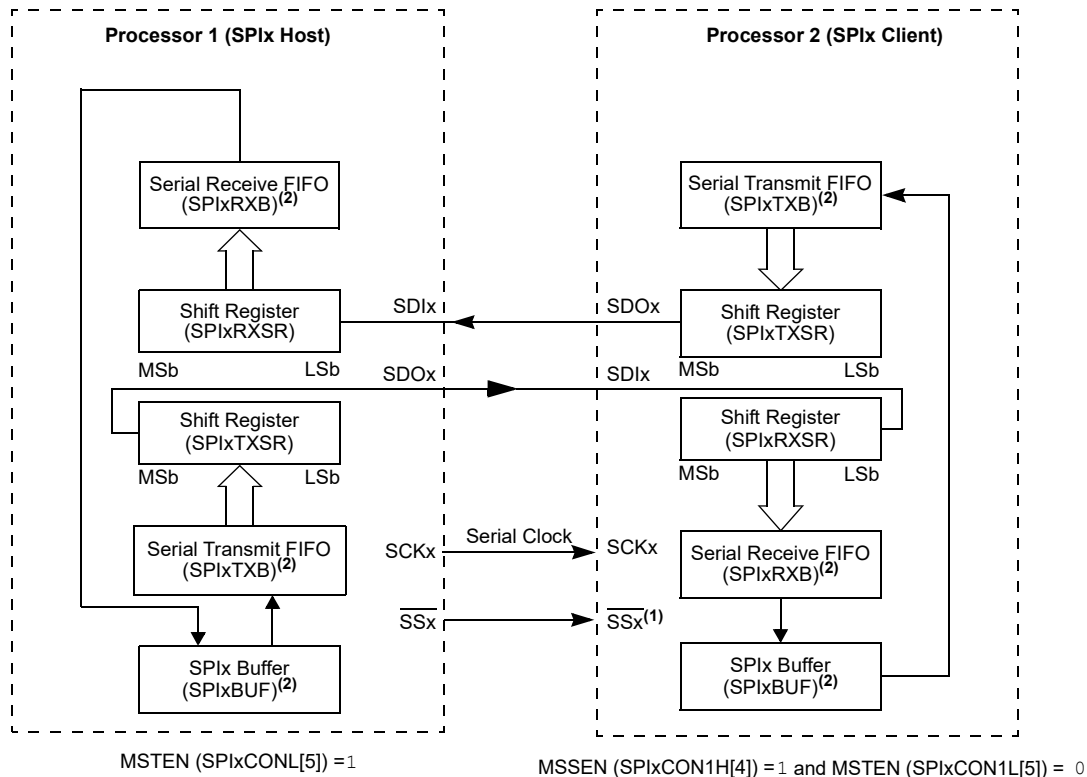

Note 1: Using the $\overline{SSx}$ pin in Client mode is optional.

Note 2: User must write transmit data to read the received data from SPIxBUF. The SPIxTXB and SPIxRXB registers are memory-mapped to SPIxBUF.