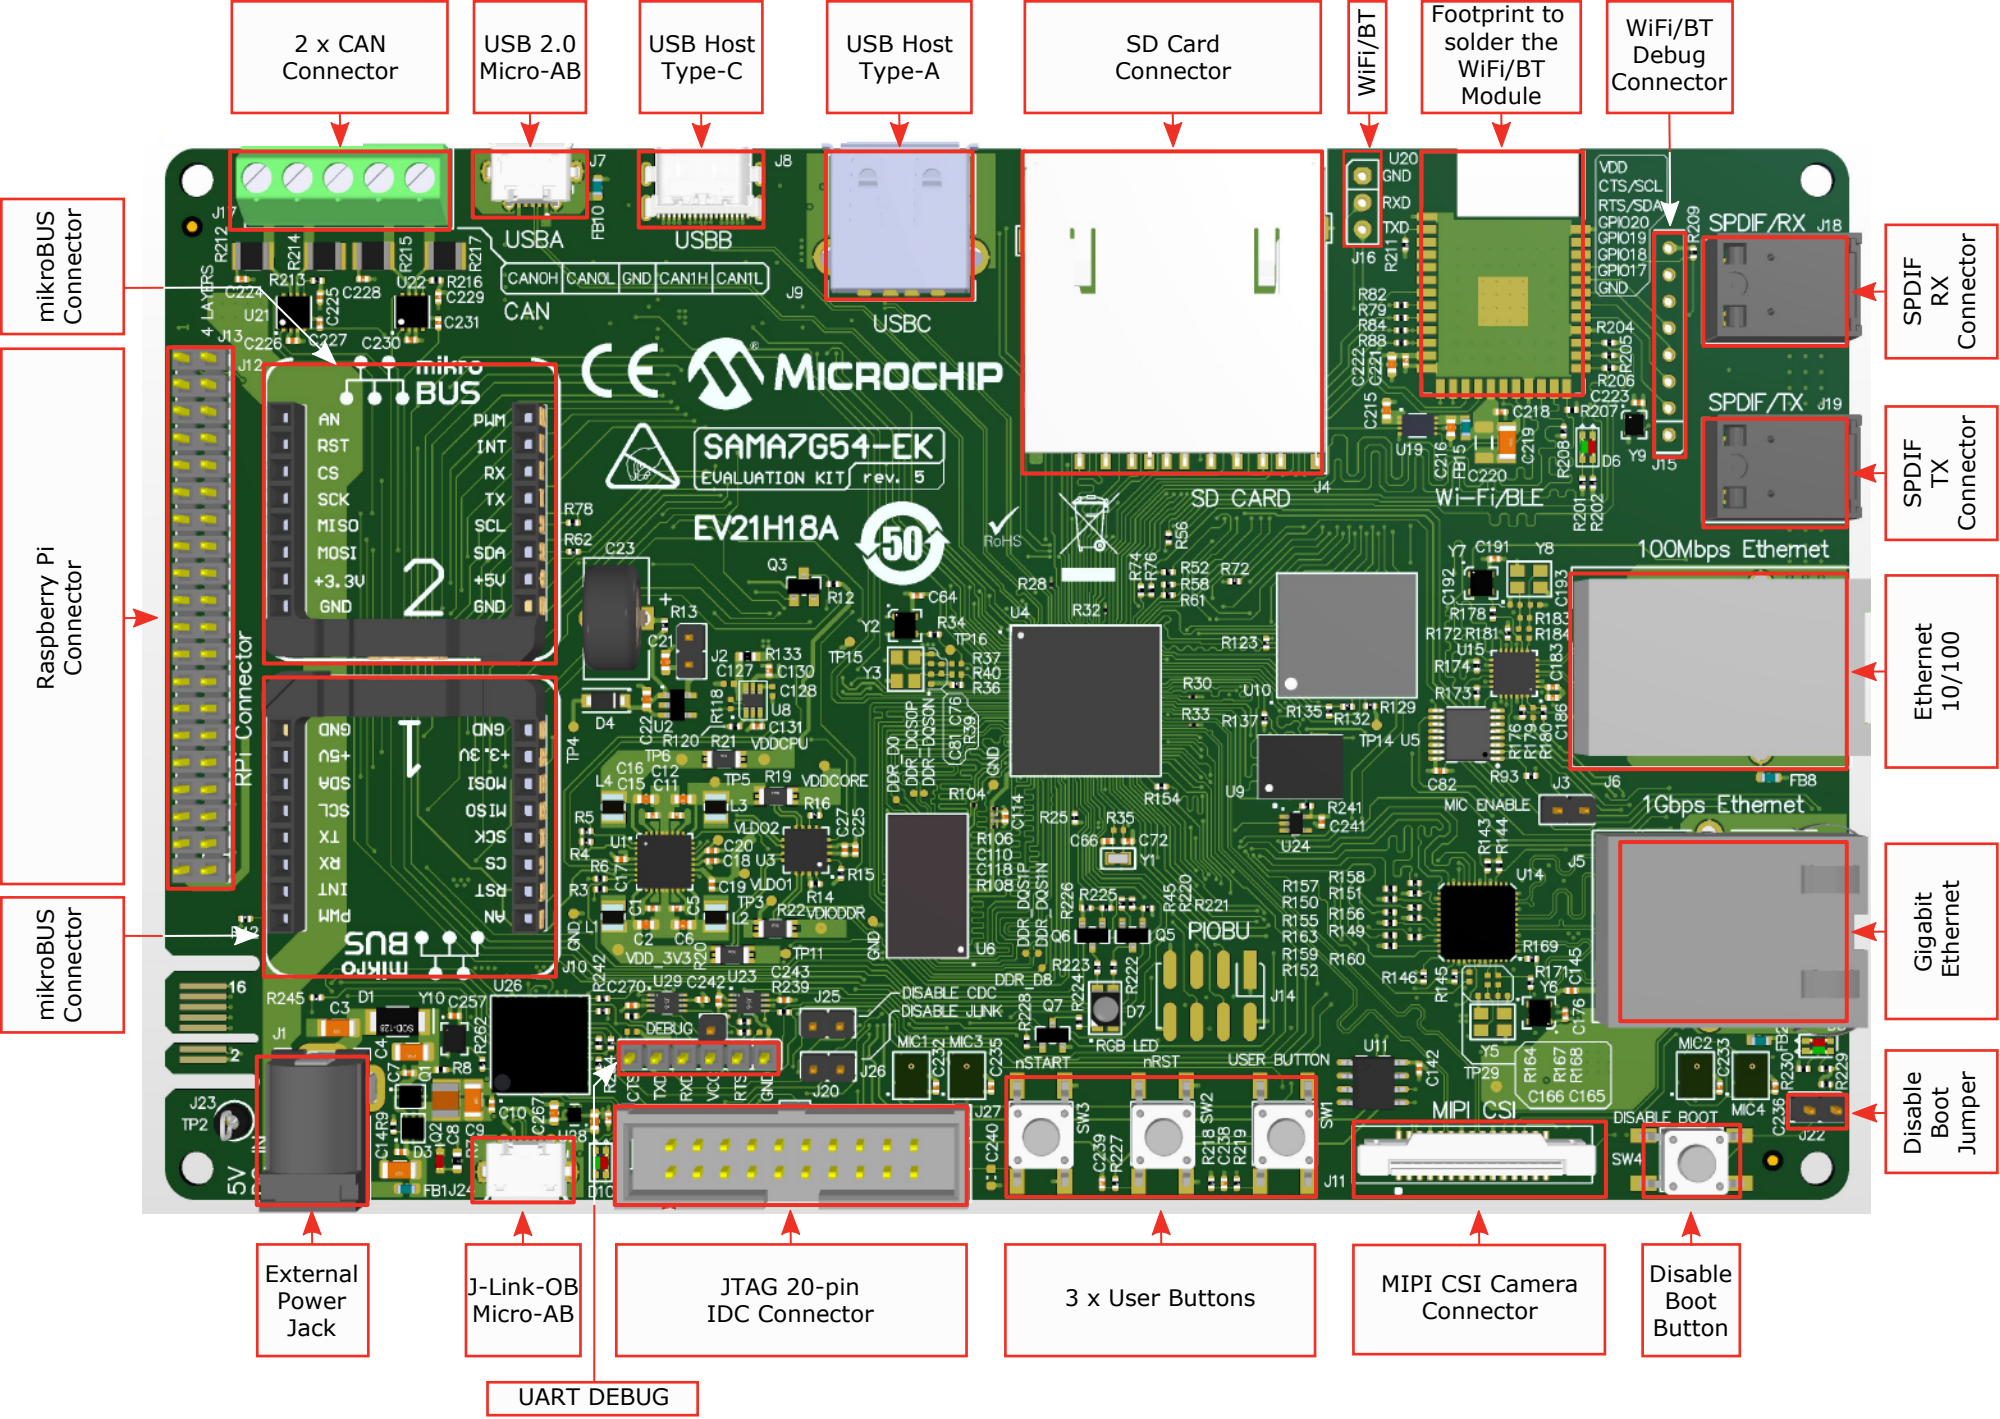
2 x CAN Connector
USB 2.0 Micro-AB
USB Host Type-C
USB Host Type-A
SD Card Connector
WiFi/BT
Footprint to solder the WiFi/BT Module
WiFi/BT Debug Connector
mikroBUS Connector
Raspberry Pi Connector
mikroBUS Connector
SPDIF RX Connector
SPDIF TX Connector
Ethernet 10/100
Gigabit Ethernet
Disable Boot Jumper
External Power Jack
J-Link-OB Micro-AB
JTAG 20-pin IDC Connector
3 x User Buttons
MIPI CSI Camera Connector
Disable Boot Button
UART DEBUG
SAMA7G54-EK
EVALUATION KIT
EV21H18A
MICROCHIP
SD CARD
Wi-Fi/BLE
100Mbps Ethernet
1Gbps Ethernet
SPDIF/RX
SPDIF/TX
MIPI CSI
PIOBU