


USB2.0 STD-A FEMALE

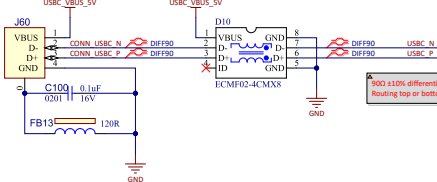

900 $\pm$ 10% differential trace impedance
Routing top or bottom