


USB2.0 STD-A FEMALE

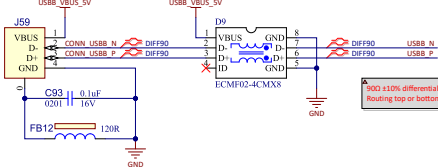

90Ω ±10% differential trace impedance
Routing top or bottom