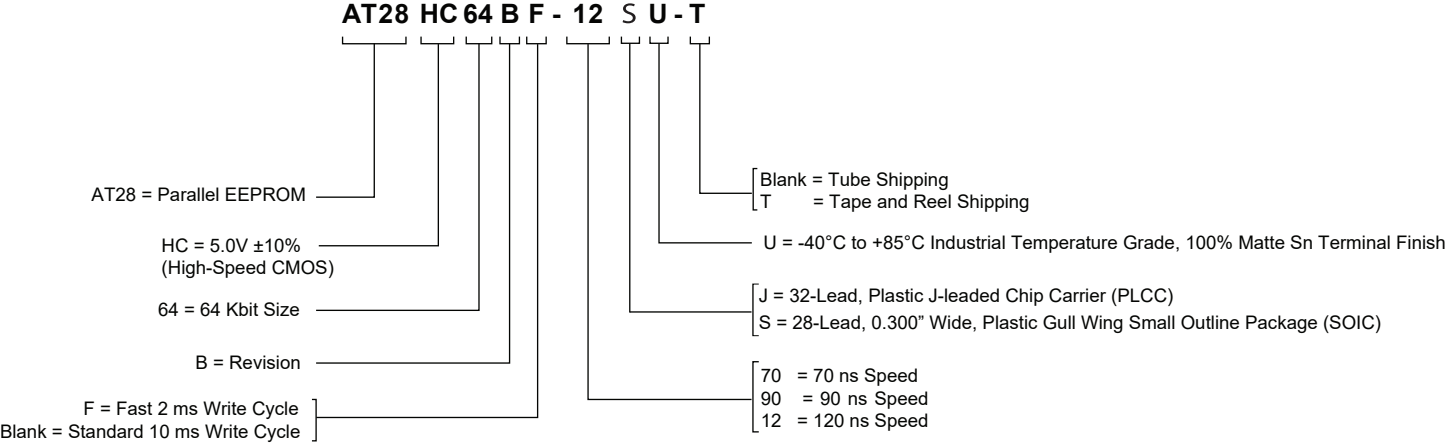
AT28 HC 64 B F - 12 S U - T
AT28 = Parallel EEPROM
HC = 5.0V ±10%
(High-Speed CMOS)
64 = 64 Kbit Size
B = Revision
F = Fast 2 ms Write Cycle
Blank = Standard 10 ms Write Cycle
Blank = Tube Shipping
T = Tape and Reel Shipping
U = -40°C to +85°C Industrial Temperature Grade, 100% Matte Sn Terminal Finish
J = 32-Lead, Plastic J-leaded Chip Carrier (PLCC)
S = 28-Lead, 0.300" Wide, Plastic Gull Wing Small Outline Package (SOIC)
70 = 70 ns Speed
90 = 90 ns Speed
12 = 120 ns Speed