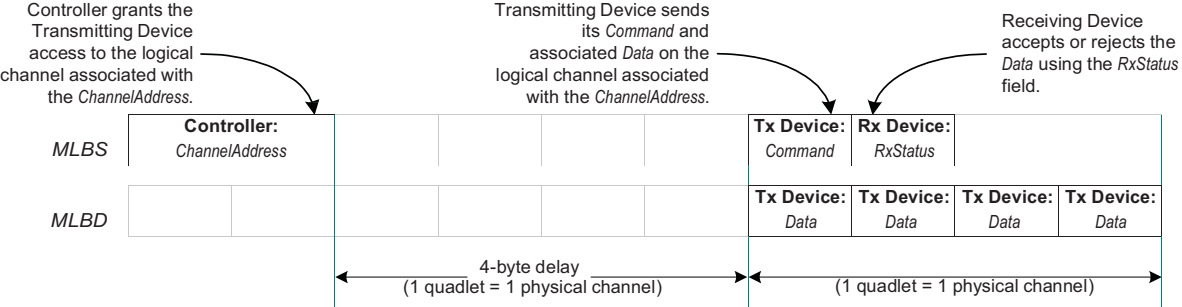
Controller grants the Transmitting Device access to the logical channel associated with the ChannelAddress.
Transmitting Device sends its Command and associated Data on the logical channel associated with the ChannelAddress.
Receiving Device accepts or rejects the Data using the RxStatus field.
MLBS
Controller:
ChannelAddress
Tx Device:
Command
Rx Device:
RxStatus
MLBD
Tx Device:
Data
Tx Device:
Data
Tx Device:
Data
Tx Device:
Data
4-byte delay
(1 quadlet = 1 physical channel)
(1 quadlet = 1 physical channel)