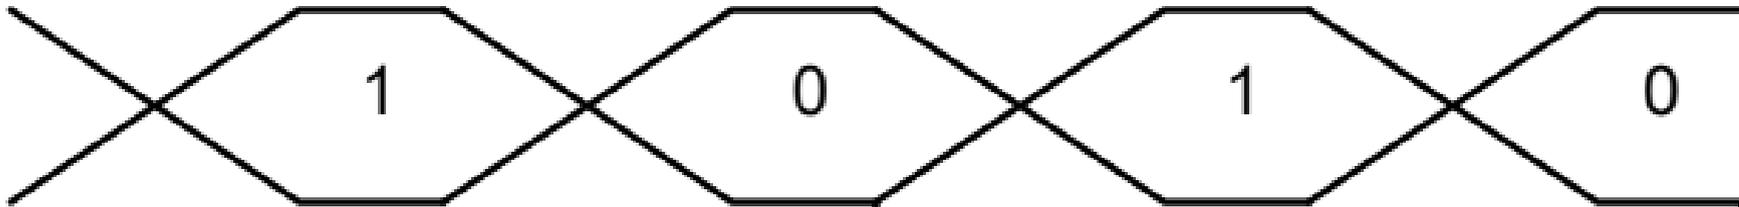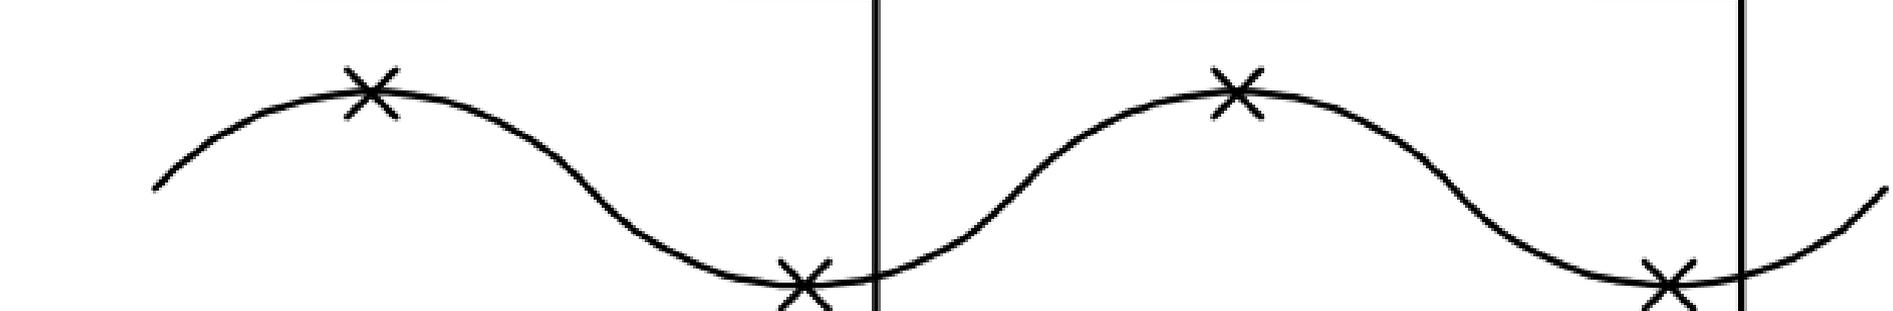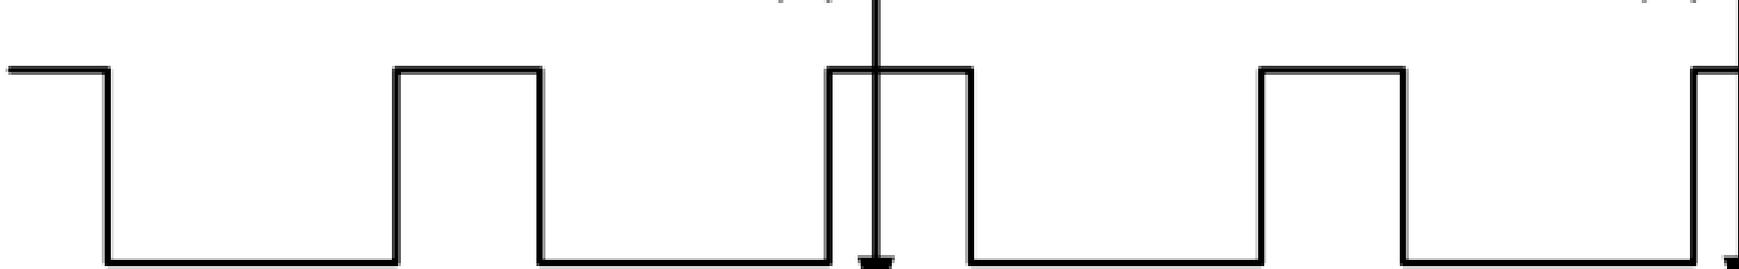polarity

Modulated sine or cosine

RDC trigger

input inverted

input inverted