| QSCK cycle (for reference) | 1 | 2 | 3 | 4 | 5 | **6** | 7 | 8 |

QSCK (CPOL = 0)

QSCK (CPOL = 1)

MOSI (from host): MSB, 6, 5, 4, 3, 2, 1, LSB

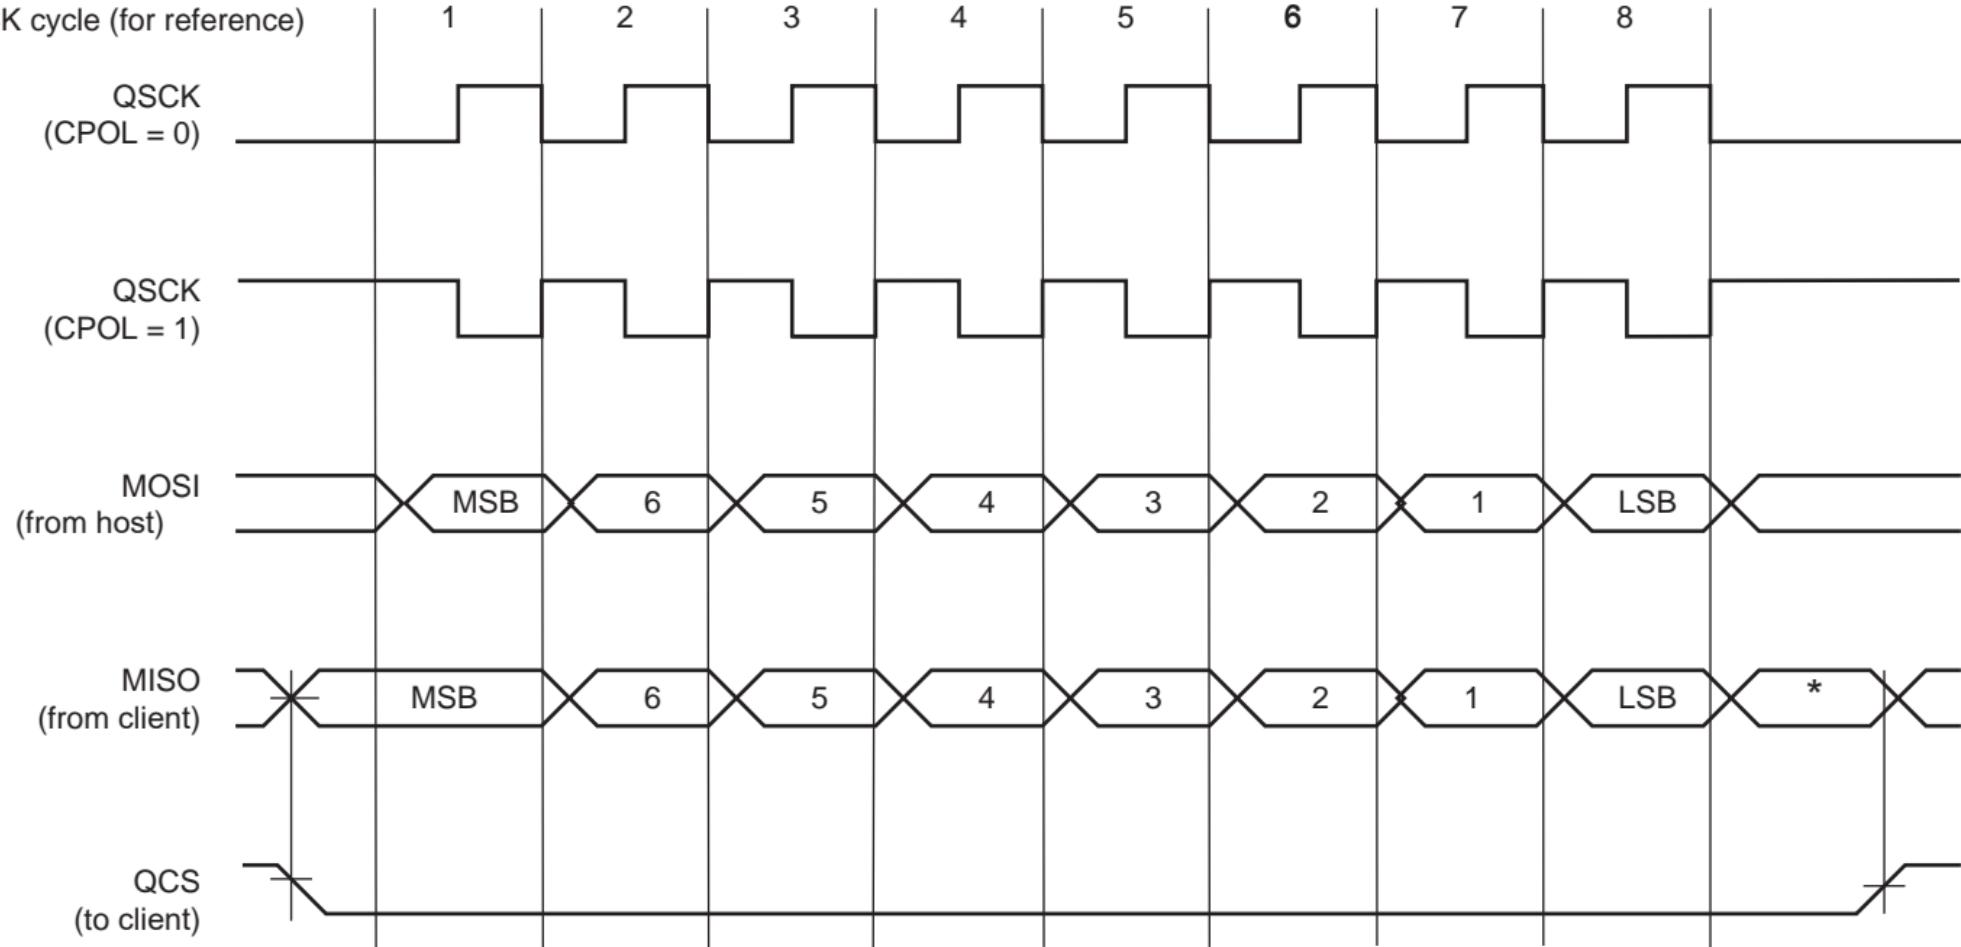MISO (from client): MSB, 6, 5, 4, 3, 2, 1, LSB, *

QCS (to client)

* Not defined, but normally MSB of previous character received.